


ASSEMBLY INSTRUCTIONS FOR YOUR
EDWARD WALL SCONCE

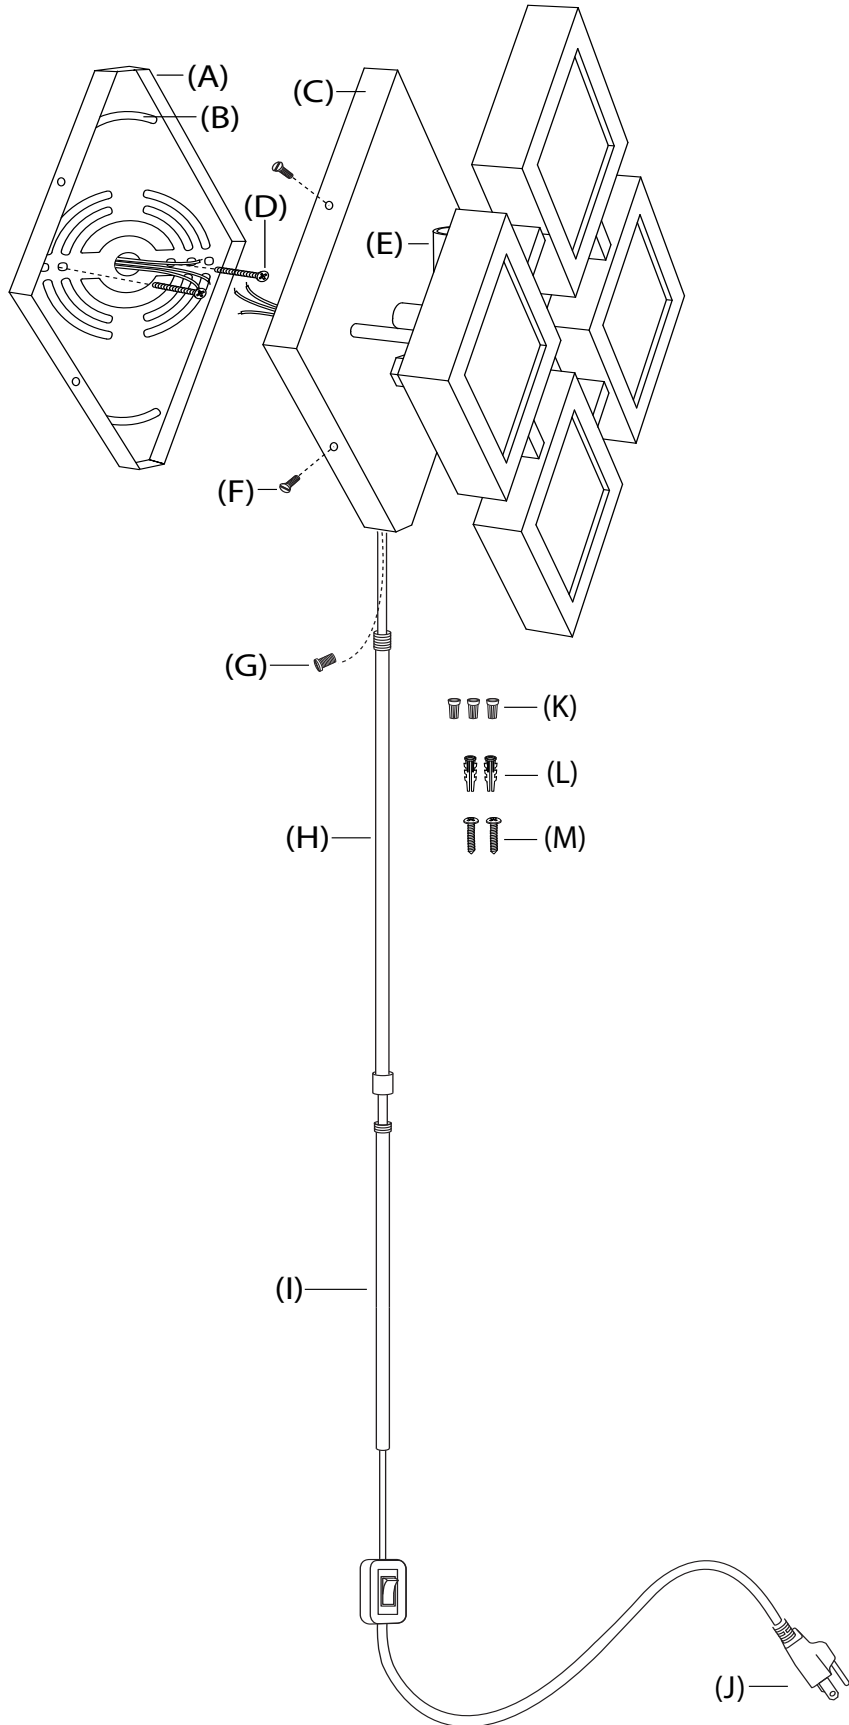

ASSEMBLY INSTRUCTIONS FOR YOUR EDWARD WALL SCONCE

IMPORTANT SAFETY INSTRUCTIONS:

- * These instructions are provided for your safety.
- * It is very important that they are read completely before beginning the installation of your fixture.
- * **WE STRONGLY RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.**
- * Turn off power at switch before replacing bulbs, making sure fixture has had sufficient time to cool down.
- * This fixture is UL rated for dry locations.

CORD COVER ASSEMBLY INSTRUCTIONS:

1. Remove mounting plate (A) from backplate (C) by removing screws (F). Set screws (F) aside.
2. Determine desired location for light fixture on wall. Hold mounting plate (A) in a level position on desired wall location. Using a pencil, mark the location of the support holes (B) at the top and bottom of the mounting plate onto the wall.
3. Drill small holes at marked locations on the wall. Holes should be sized so wall anchors (L), provided, fit snug inside the opening. Insert wall anchors into drilled holes.
4. Thread mounting screws (M) through support holes (B) in the mounting plate, and into wall anchors (L).
5. Slide backplate (C) over mounting plate (A). Thread screws (F) back into holes at the top and bottom of backplate (C) to secure fixture to the mounting surface.
6. Thread cord cover (H) into the bottom of backplate (C). Thread cord cover (I) onto cord cover (H).
7. Insert two 40 WATT MAX. Type B, Candelabra Base bulbs into the sockets (E).
8. Insert three prong plug (J) into wall outlet.
9. Control power to the fixture by using the switch on the cord.

ASSEMBLY INSTRUCTIONS:

1. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/ CIRCUIT BREAKER.
2. Remove all parts from carton and discard packing materials. Place the parts on a level surface.
3. Remove mounting plate (A) from backplate (C) by unthreading screws (F). Set screws (F) aside.
4. Place the mounting plate (A) against the mounting surface so it is aligned with the wall outlet box. Once aligned, check to make sure that the mounting plate is level. When proper placement has been confirmed, use a pencil to mark the locations of the mounting plate support holes (B) onto the mounting surface.
5. Set the mounting plate aside and drill small holes at the marked locations. Holes should be sized so anchors (L) fit securely inside.
6. Push anchors (L) into the holes.
7. Carefully pull wires from the wall outlet box and thread them through the center hole in mounting plate (A).
8. Affix mounting plate (A) to wall outlet box with mounting screws (D) provided.
9. For additional support, thread mounting screws (M) through support holes (B) and into wall anchors (L).
10. Cut the switch and the three prong plug (J) from the end of the electrical cord.
11. Remove cord covers (H) and (I) from the electrical cord. From the back side of backplate (C), pull the electrical cord up through hole in the bottom of the backplate.
12. Cut the cord to the desired length for making an electrical connection. At least eight inches of wire will be needed to make proper electrical connection.
13. Thread plug (G) into the hole in the bottom of backplate (C).
14. Lift the backplate (A) to the mounting plate and make the proper electrical connections noted in steps 15 through 17. A LICENSED ELECTRICIAN IS RECOMMENDED.
15. Attach ground wire from fixture (green or copper in color) to ground wire from outlet box. Fasten wires together with wire nut (K) and tightly wrap connection with electrical tape.
16. Attach hot wire from fixture (black in color or smooth side of wire) to hot wire from outlet box. Fasten wires together with wire nut (K) and tightly wrap connection with electrical tape.
17. Attach neutral wire from fixture (white in color or ribbed side of wire) to neutral wire from outlet box. Fasten wires together with wire nut (K) and tightly wrap connection with electrical tape. Gently push wire connections back into the wall outlet box.
18. Place backplate (C) over mounting plate (A). Use screws (F) to secure the backplate to the mounting surface.
19. Install two 40W max., type B, candelabra base bulbs into the sockets (E).
20. Reconnect main electrical supply at the fuse box/ circuit breaker and test the fixture.