

**Wellsworth Outdoor Post****OL13207 1.0****FEISS®**

EST. 1955

**Outdoor****GENERAL PRODUCT INFORMATION:**

This product is safety listed for wet locations.


Incandescent lamps may be dimmed with a standard incandescent dimmer.  
LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

**CAUTION - RISK OF FIRE**

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

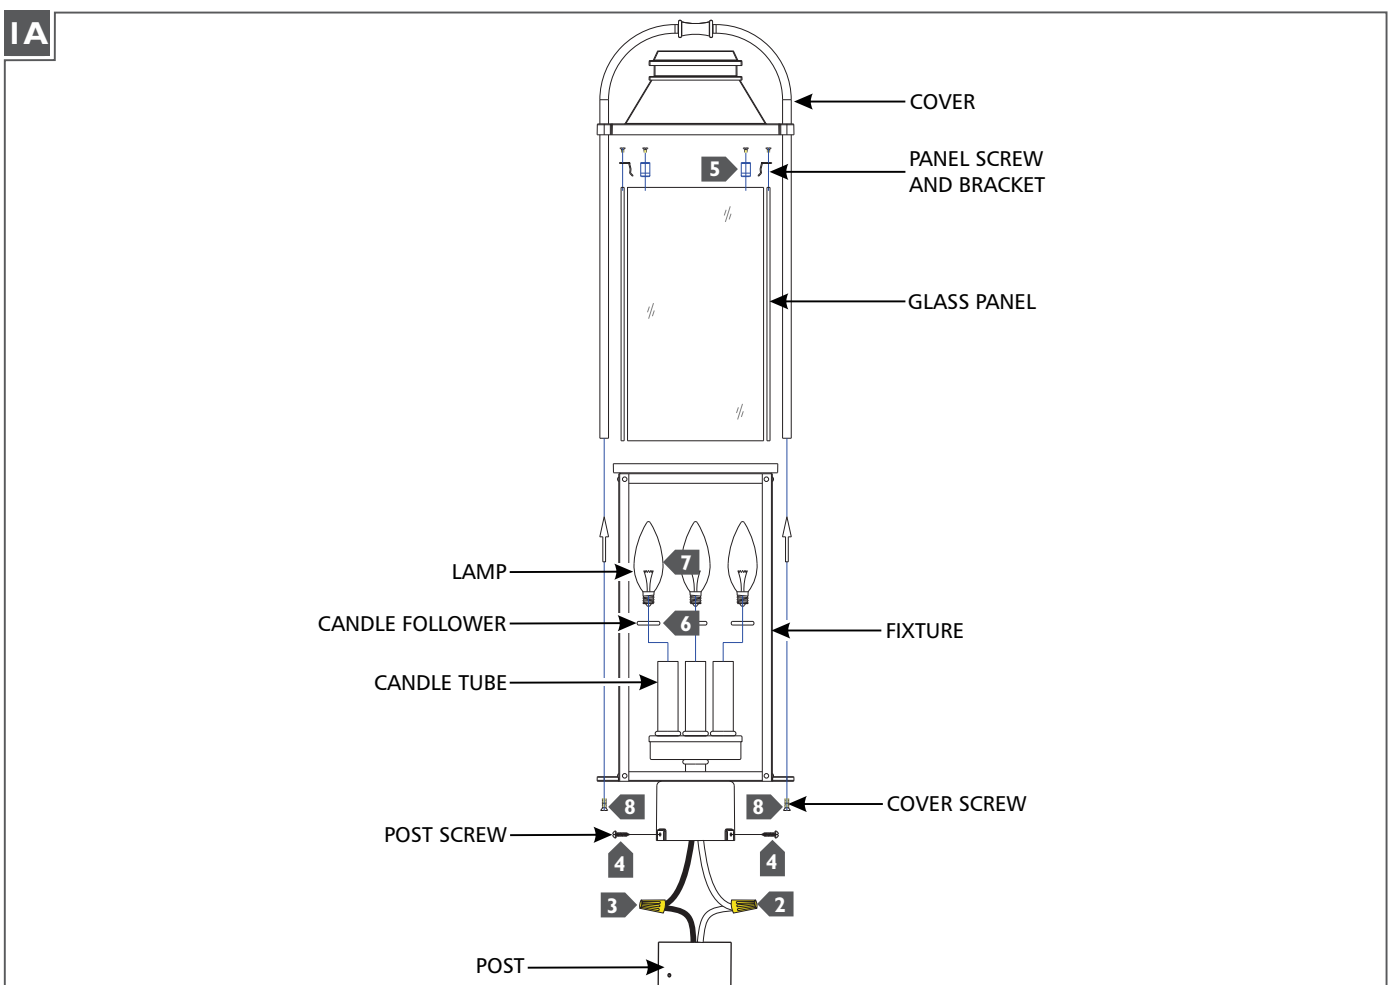


- 1** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 2** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 3** Connect the black fixture wire to the hot power line wire with a wire nut.
- 4** Secure the fixture to the post with the post screws making sure to neatly tuck in all wiring.
- 5** Insert the glass panels into the fixture and secure them in place using the panel screws and brackets.
- 6** Install the candle followers on top of the candle tubes.
- 7** Screw the lamp into the socket. Refer to the label on the socket for Max Wattage Information.
- 8** Install the cover onto the fixture and secure it using the cover screws.

**ATTENTION : RISQUE D'INCENDIE**

Ce produit doit être installé conformément au code d'installation en vigueur par une personne familière avec la construction et l'exploitation du produit et les risques qu'il entraîne.

**Utiliser les conducteurs d'alimentation supérieure à 90° c.**

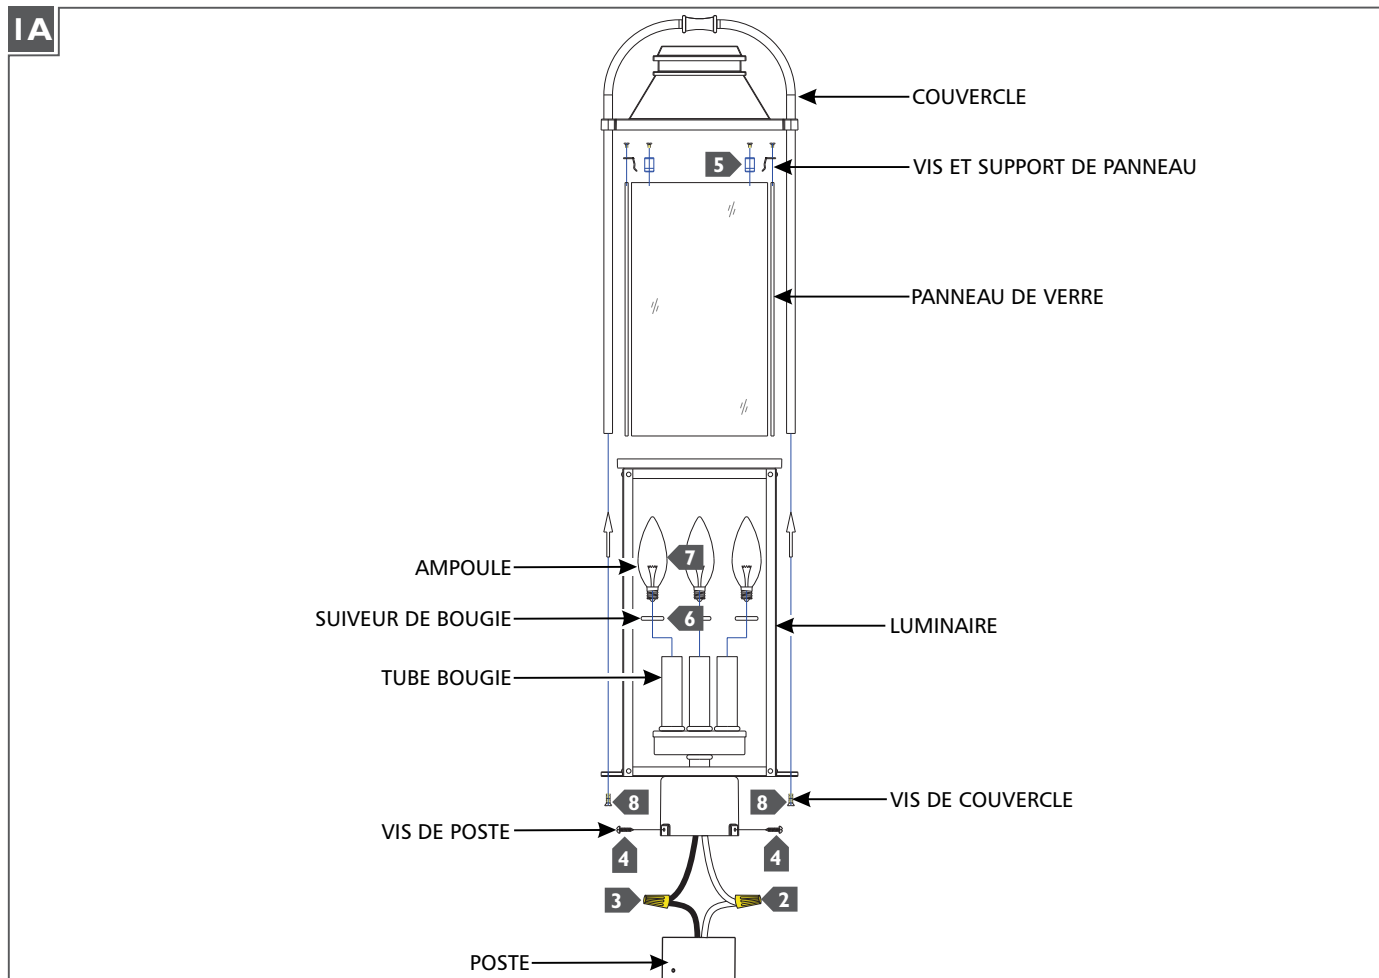


- 1** Connectez le luminaire à un terrain approprié en accord avec les codes électriques locaux.
- 2** Connectez le fil blanc de luminaire au fil de ligne à neutre avec un écrou de fil.
- 3** Connectez le fil noir de luminaire au fil chaud de la ligne d'alimentation avec un écrou de fil.
- 4** Fixez le luminaire à la poste avec les vis de poste en s'assurant de rentrer facilement dans tout le câblage.
- 5** Insérez les panneaux de verre dans la luminaire et fixez-les en place en utilisant les vis et les supports de panneau.
- 6** Installez les suiveurs de la bougie sur le dessus des tubes de bougies.
- 7** Visser l'ampoule dans la douille. Reportez-vous à l'étiquette sur la prise pour Max Wattage information.
- 8** Installer le couvercle sur le luminaire et le fixer avec les vis de couvercle.

**PRECAUCIÓN: RIESGO DE INCENDIO**

Este producto debe instalarse de acuerdo con el código de instalación aplicable por una persona familiarizada con la construcción y operación del producto y los riesgos que conllevan.

**Utilizar conductores de suministro mínimo 90° c.**

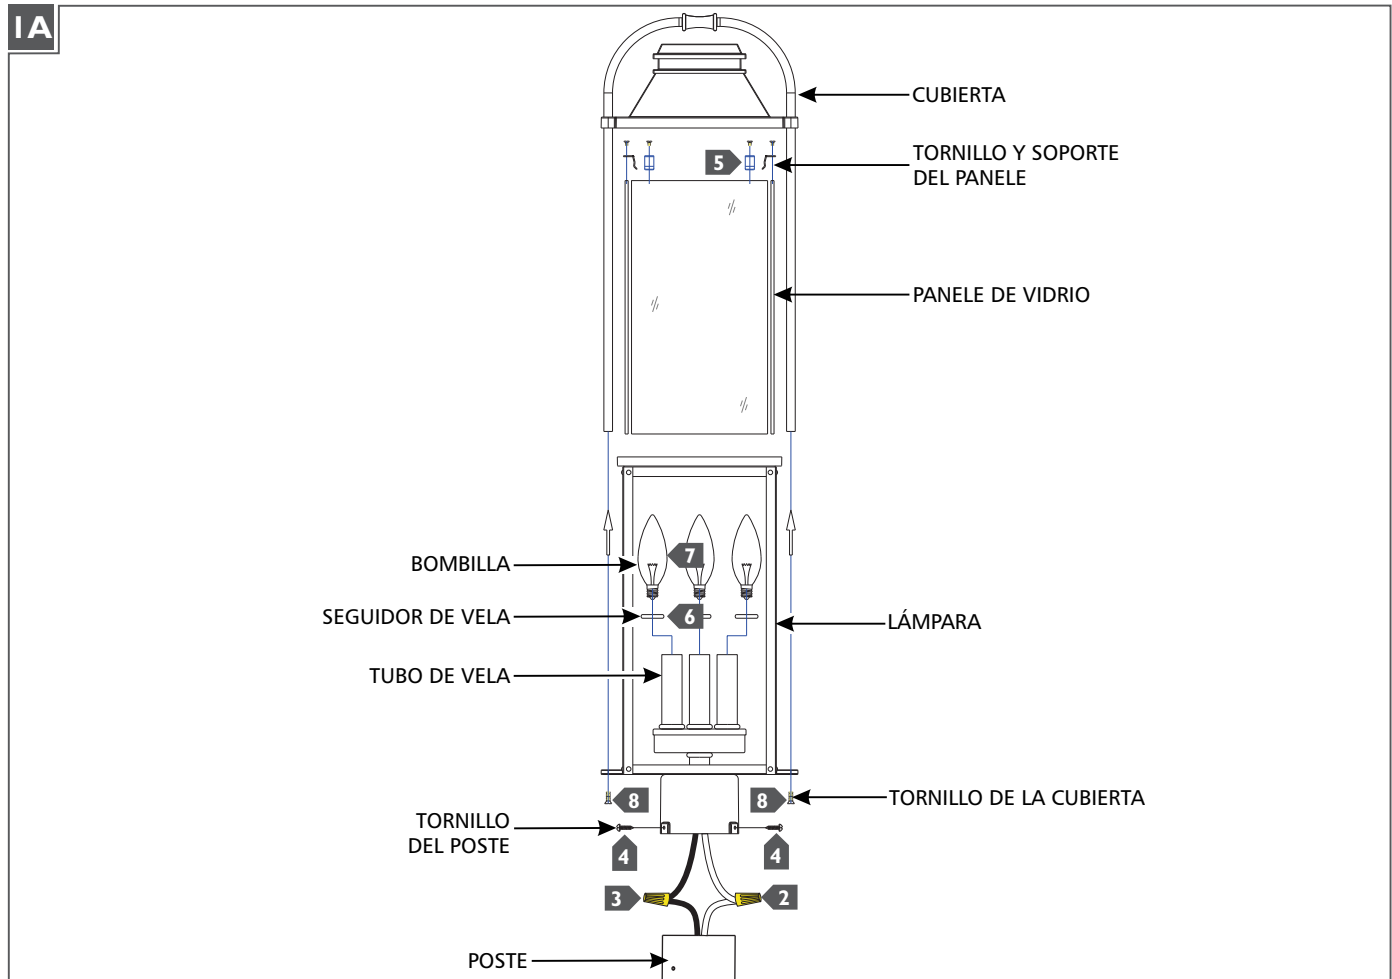

**SAVE THESE INSTRUCTIONS!**

**FEISS**<sup>®</sup>

EST. 1955  
7400 Linder Ave, Skokie, IL 160077

800.969.3347

[www.Feiss.com](http://www.Feiss.com)

© 2017 Feiss. All rights reserved. The "Feiss" graphic is a registered trademark of Feiss. Feiss reserves the right to change specifications for product improvements without notification.  
A Generation Brands Company